
# **5-Tier Open Shelf**









# **INCLUDED COMPONENTS FOR ASSEMBLY**

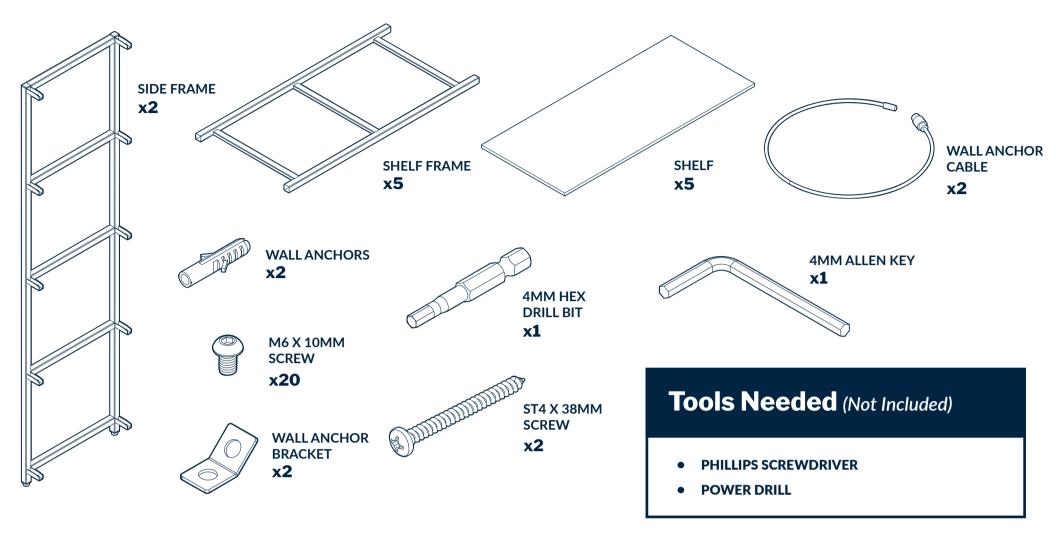

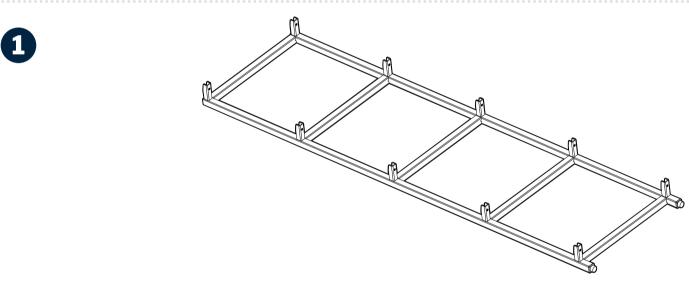


Take one of the **SIDE FRAMES** and lay it on a flat surface.



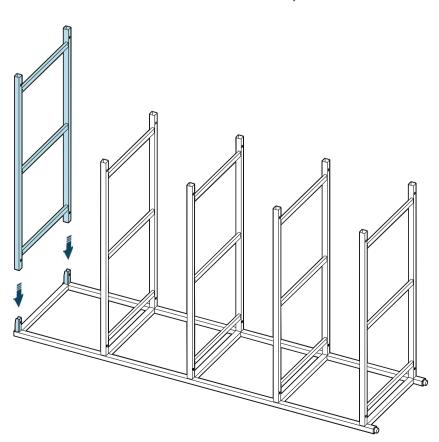


Insert the (5) **SHELF FRAMES** into the **SIDE FRAME** connection points.

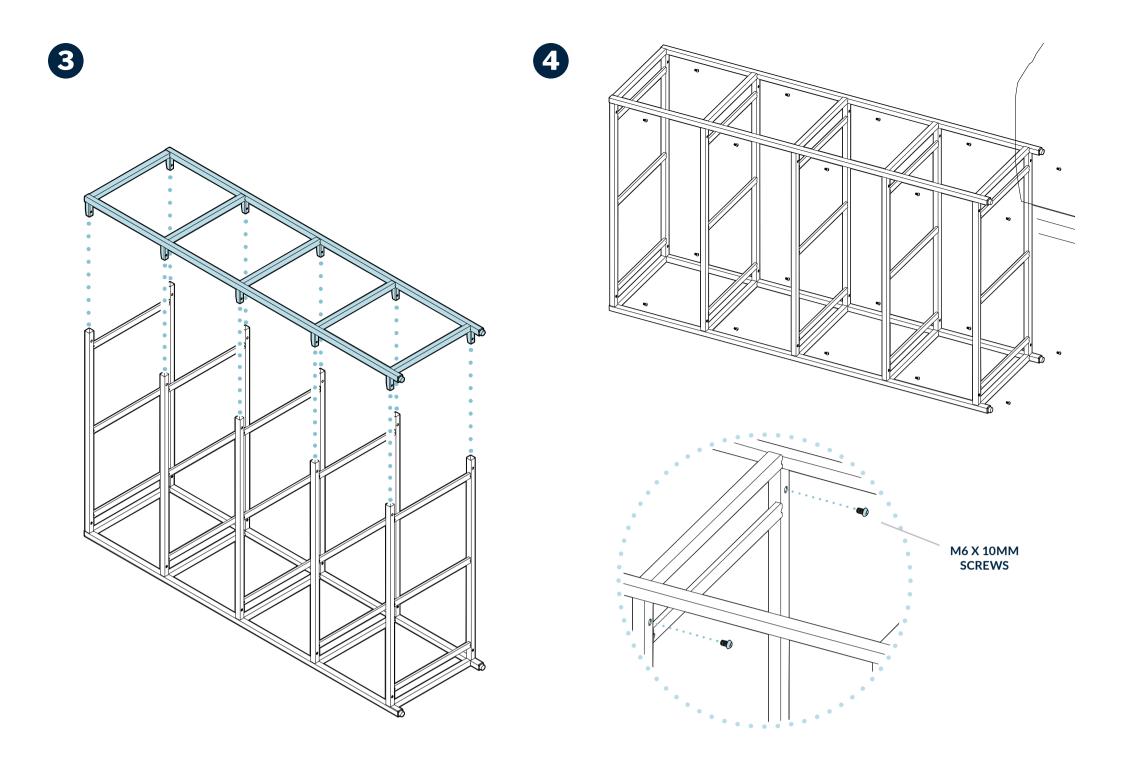

Take the other **SIDE FRAME** and slot the connection points into each **SHELF FRAME** insert.

Insert the (4) M6 X 10MM SCREWS into each SHELF FRAME, for a total of (20), and securely tighten them using the included 4MM ALLEN KEY or a power drill and the included 4MM HEX DRILL BIT.



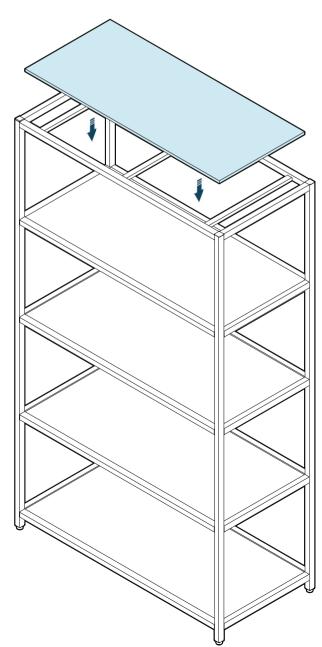


Depending on where you intend to place the 5-Tier Open Shelf and the wall type, follow the corresponding instructions below.

NOTE: Determine where the Shelf will be placed BEFORE installing the wall anchors.




#### **INTERIOR WALL STUD**

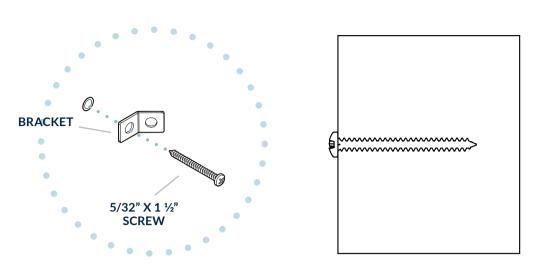

- A. Using a STUD FINDER (not included), determine which wall studs the WALL ANCHORS will be installed in prior to installation.
- **B.** To attach the included **WALL ANCHOR BRACKETS** to an interior wall stud, use a **POWER DRILL** or **PHILLIPS SCREWDRIVER** to screw in (1) **ST4 X 38MM SCREW** into each bracket.




### WITHOUT WALL STUDS

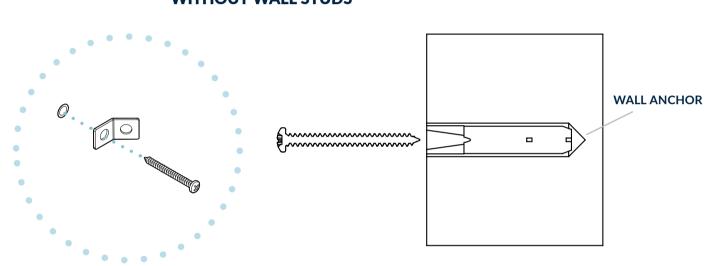

- **A.** Drill a hole slightly larger in diameter than the **PLASTIC WALL ANCHOR**.
- **B.** Insert the **WALL ANCHOR** in the pilot hole, and gently tap it into place until it is completely inserted and almost flush with the wall.
- **C.** Once the **WALL ANCHORS** are in place, secure each **WALL ANCHOR BRACKET** by screwing in **(1) ST4 X 38MM SCREW** into each wall anchor using a **PHILLIPS SCREWDRIVER**.





## **MASONRY OR CONCRETE**

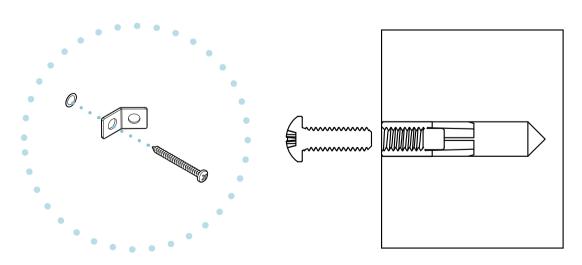

- **A.** Drill a hole to the size recommended by your masonry or concrete wall anchor manufacturer instructions.
- NOTE: Instructions may vary depending on the masonry or concrete wall anchor purchased. Follow the manufacturer instructions to ensure the wall anchors are installed properly.
- **B.** Next, carefully tap the **ANCHOR** into the hole using a hammer.
- C. Tighten the screw or bolt to expand the WALL ANCHOR. This will securely grip the wall anchor inside of the hole to provide a solid hold.
- **D.** Once the **WALL ANCHORS** are in place, secure each **WALL ANCHOR BRACKET** by screwing in **(1) ST4 X 38MM SCREW** into each wall anchor using a **PHILLIPS SCREWDRIVER**.



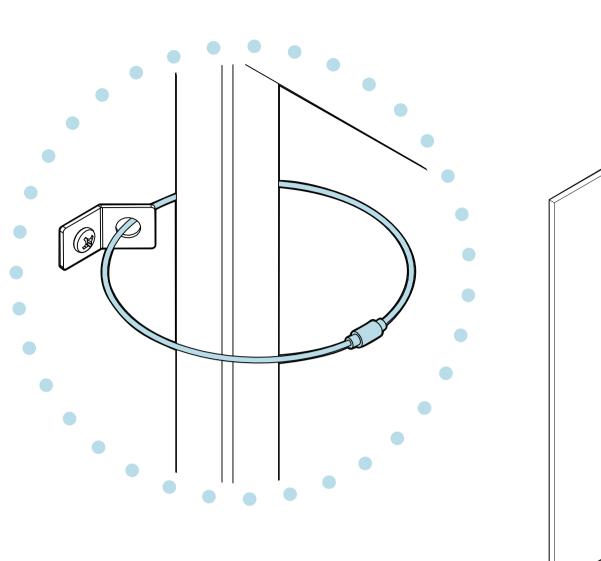

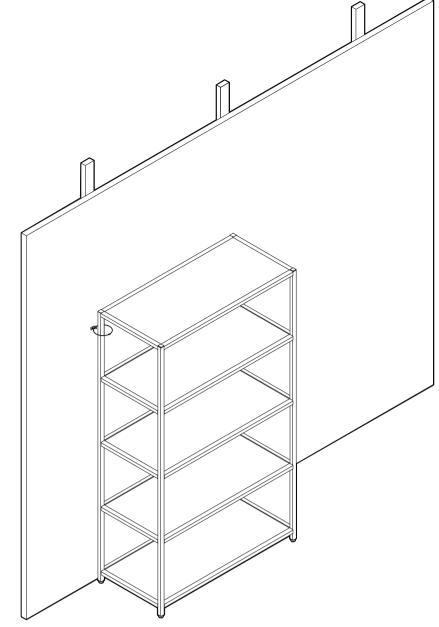

Position the 5-Tier Shelf into place. Put the male end of the **WALL ANCHOR CABLE** through the **WALL ANCHOR BRACKET** and wrap it around the back post of the **FRAME**. Twist the female connector to securely lock the cable.

NOTE: Please load heavier objects on the bottom shelves to ensure the Shelf remains stable.



**WARNING:** Injury may result from tipping furniture.



**WARNING:** You must install the Tipping Restraint Hardware with the unit to prevent the unit from tipping and causing any accidental injury, disability, death, or damage.



**WARNING:** The Tipping Restraint is intended only as a safety measure, it is not a substitute for proper adult supervision.



**WARNING:** This Tipping Restraint is not an earthquake restraint. If you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.



**WARNING:** Do not allow children to climb on furniture.



**WARNING:** Failure to detach this restraint before moving furniture may result in injury and damage.